FIG. 1A




FIG. 1B






FIG. 2

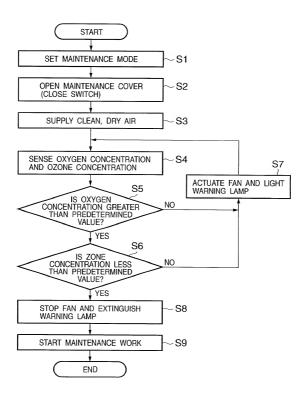

COCKLIES CUCCOL



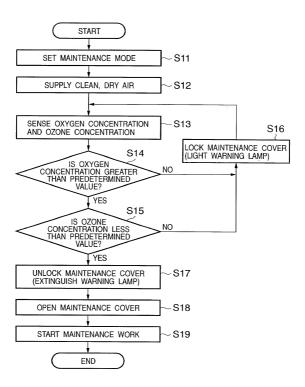


FIG. 5


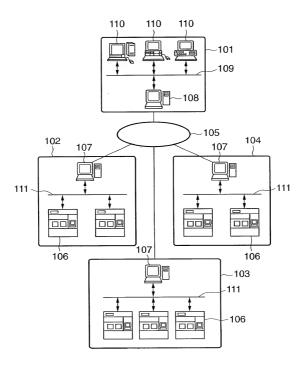


FIG. 6



URL http://www
URL http://www·····
MALFUNCTION DATABASE INPUT SCREEN
INPUT
MODEL ********
SUBJECT MATTER OPERATING MALFUNCTION (ERROR AT BOOTING) ~403
EQUIPMENT SERIAL NO. 465NS · · · · · 402
DEGREE OF URGENCY D 405
CONDITION LED CONTINUES FLASHING AFTER POWER IS TURNED ON 406
407
COUNTERMEASURE POWER TURNED ON AGAIN METHOD (RED BUTTON PUSHED AT START UP)
`
PROGRESS TEMPORARY MEASURES COMPLETED 1 408
0
SEND RESET 410 411 412
LINK TO DATABASE OF RESULTS SOFTWARE LIBRARY OPERATING GUIDE

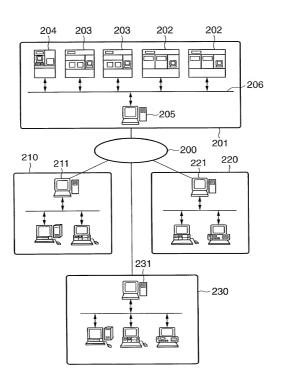